

250 Series DIN-rail and Wall Mounted Relays

Hot Spot 6 Temperature Relay

The Hot Spot 6 protector is a temperature trip relay accepting up to six inputs from resistance temperature detector (RTD) elements and provides one user adjustable trip point which can be used to initiate alarms, cooling or shutdown when the monitored temperature exceeds the set limit. The relay is ideally suited for the protection of electric motor windings, transformers, generator windings and bearing temperature.

Operation

RTD temperature sensors are often fitted inside electric motors to detect hot spots in the windings or bearings. RTD sensors are popular because they offer a good accuracy for a reasonable price. The same sensors can be used inside transformers, generator sets, gas turbines or as part of a process control system. Hot spots can be caused by many conditions such as overloads, over-voltage, unbalanced supply, worn bearings, ineffective cooling, poor ventilation, shorted turns, insulation breakdown, single phasing etc.

The Hot Spot 6 protector continuously monitors the six RTD temperature sensors and offers a user adjustable set point and relay contacts. This can be used to raise alarms, switch on cooling systems or shut down the affected equipment. The temperature is compared with the user adjustable set point. There is a red alarm indicator associated with each temperature sensor. When the measured temperature exceeds the set point on one or more inputs the red alarm indicators associated with temperature sensor(s) exceeding the set point temperature will illuminate to indicate which sensors are above the set point. When any input is above the set point, the relay will de-energise, the overall red "Alarm" will illuminate and the green "Safe" will extinguish.

When the temperature on all inputs drops below the set point the relay will reset to the energised condition, the overall red "Alarm" will extinguish and the green "Safe" will illuminate.

Product Codes

| Relay | Protection | ANSI no. | Cat. no. |
|--------------|-------------|----------|----------|
| 6 RTD inputs | 1 set point | 49 | 256-PCC |

When ordering please supply the following information:

- System voltage, frequency and required options.
- The type of temperature sensor being used, e.g. Platinum PT100.
- The maximum temperature or meter scale, e.g. 100% = 1mA = 150°C.
- The set point adjustment range, e.g. 0°C to 150°C.



Features

- Up to 6 RTD inputs
- Adjustable set point
- Internal differential
- LED trip indication
- Automatic reset
- Single-pole relay contacts

Benefits

- Unbalanced supply protection
- Sustained overload protection
- Single-phasing protection
- Blocked ventilation protection
- Protection against ineffective cooling
- Protection of bearing temperature

Applications




- Switchgear
- Distribution systems
- Generator sets
- Control panels
- Process control
- Motor monitoring
- Transformers
- Overload protection

Specification - Hot Spot 6 Temperature Relay

| | |
|-----------------------------|---|
| Input | Up to 6 resistance temperature detectors (RTD). Either 10Ω copper or 100Ω platinum minimum span 100°C |
| Nominal voltage | AC: 110V, 120V, 220V, 230V, or 240V ±20% DC: Consult factory |
| System frequency | 50/60Hz |
| Voltage burden | 6VA maximum |
| Overload | 1.2 x rating continuously |
| Set point repeatability | Within 1°C |
| Differential (hysteresis) | 4°C of nominal |
| Trip level adjustment | 100°C (e.g.: 50 to 150°C, 100 to 200°C etc) |
| Time delay | Typically 250ms |
| AC auxiliary supply voltage | 100V, 110V, 120V, 208V, 220V, 240V, 480V, ±20% |
| DC auxiliary supply voltage | 12V, 24V, 48V, 110V or 125V, ±20%. Including ripple |
| Auxiliary voltage burden | 4VA (max) |
| Output relay | 1-pole change over |
| Relay contact rating | AC: 240V 5A non inductive DC: 24V 5A resistive |
| Relay mechanical life | 0.2 million operations at rated loads |
| Relay reset | Automatic |
| Operating temperature | 0°C to +60°C (0°C to +40°C for UL models) |
| Storage temperature | -20°C to +70°C |
| Temperature co-efficient | 0.05% per °C |
| Interference immunity | Electrical stress surge withstand and non-function to ANSI/IEEE C37 90a |
| Enclosure style | DIN-rail with wall mounting facility |
| Material | Flame retardant polycarbonate/ABS |
| Enclosure integrity | IP50 |
| Dimensions | 150mm (5.9") wide x 70mm (2.8") high x 112mm (4.4") deep |
| Weight | 1.0Kg approx. |


Dimensions

Model 256

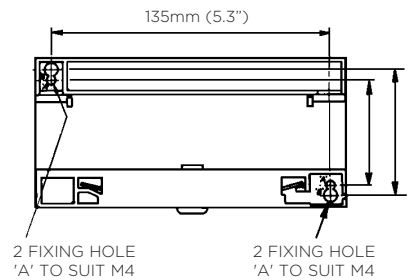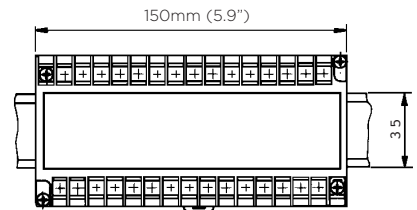

Connections

256-PCC

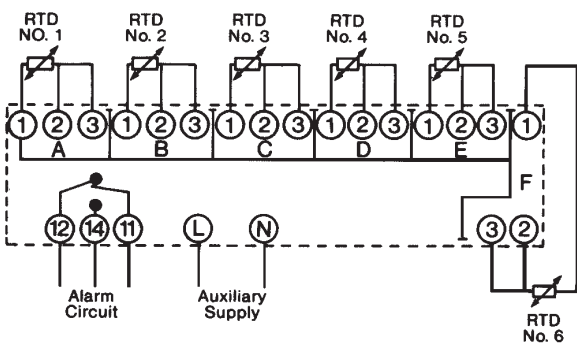

When used for less than 6 RTD inputs the unused terminals 1, 2 and 3 must be linked together.